

Technical data sheet

External corner, for device installation trunking Rapid 80 type GKH-70130

Item number: 6114220



External corner made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.

Cover must be ordered separately.




PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Master data

| | |
|------------------------------------|--|
| Item number | 6114220 |
| Type | GKH-A70130RW |
| Description 1 | External corner, halogen-free |
| Manufacturer | OBO |
| Dimension | 70x130 |
| Colour | Pure white; RAL 9010 |
| Material | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 100 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 5,4236 kg CO2e / 1 Piece |

Dimensions

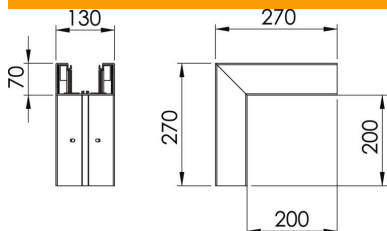

| | |
|--------|--------|
| Length | 270 mm |
| Width | 130 mm |
| Height | 70 mm |

Technical data sheet

External corner, for device installation trunking Rapid 80 type GKH-70130

Item number: 6114220



Technical data

| | |
|-----------------------------------|----------|
| Number of covers | 1 |
| Version for | Base |
| for duct width | 130 mm |
| for trunking height | 70 mm |
| Halogen-free | yes |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Internal |
| Mounting perforation in base | yes |
| Cover width | 76.5 mm |
| Cover width 2 | 0 mm |
| Cover width 3 | 0 mm |
| Protection rating | IP30 |
| Protective film | yes |
| Protection rating IK code | IK08 |
| Symmetrical | yes |
| Permitted temperature range, max. | 90 °C |
| Permitted temperature range, min. | -15 °C |
| Angle range, max. | 90 mm |
| Angle range, min. | 90 mm |