


# Technical data sheet

## Construction and suspension profile, SL62 FT

Item number: 7103643

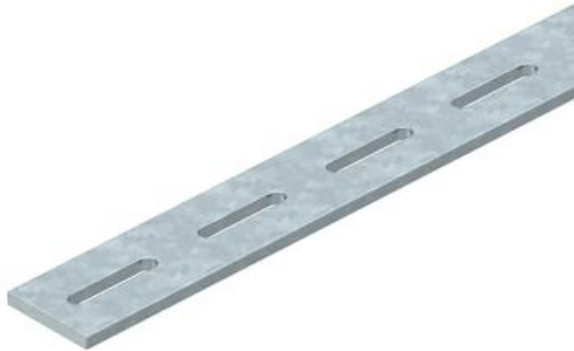

Perforated side rail of ship cable ladder, SL 62, for the creation of suspension and support constructions. Suitable for M8 fastening elements. The profile is available in bright steel on request.



St

Steel


FT

Hot-dip galvanised

### Master data

Item number	7103643
Type	SLH 62 3000 FT
Description 1	Side rail
Description 2	perforated
Manufacturer	OBO
Dimension	40x5x3000
Colour	zinc
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	3
Unit of quantity	Metre
Weight	135.7 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	3,2748 kg CO2e / 1 Meter

### Dimensions

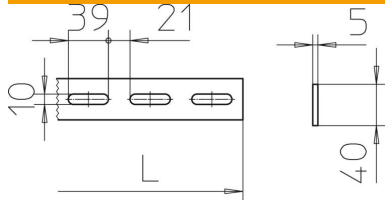

Dimension	40x5
Length	3,000 mm
Width	40 mm
Height	5 mm

### Technical data

Rustproof steel, pickled	no
--------------------------	----