
Technical data sheet

Reduction, metric thread

Item number: 2030664

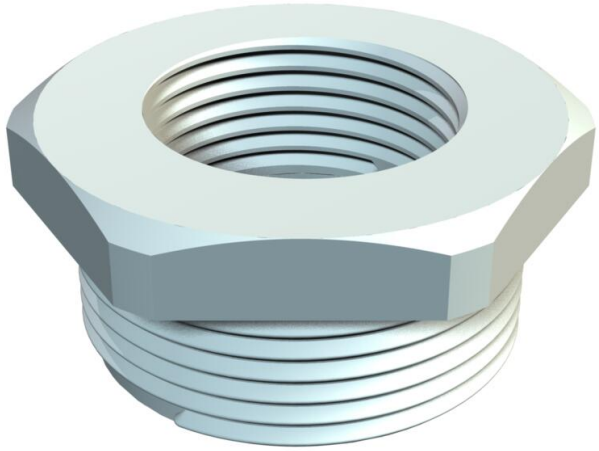

Reducer with metric inner and outer thread for the mounting of plastic cable glands on housing
IP54 protection rating without additional connection sleeve. Protection rating of
up to IP68 possible with additional connection seal, such as an O-ring or flat
sealing ring.
To prevent damage caused by differences in material behaviour, avoid using a mix of materials
Use products made from polyamide (cable glands) exclusively with polyamide accessory parts
locknuts, reducers, expansions, etc.). Use products made from polystyrene exclusively with po

HALOGEN FREE

PA Polyamide

Master data


Item number	2030664
Type	107 R M50-40 PA
Description 1	Reduction
Manufacturer	OBO
Dimension	M50-M40
Colour	Light grey; RAL 7035
Material	Polyamide
Smallest sales unit	25
Unit of quantity	Piece
Weight	2.05 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,0837 kg CO2e / 1 Piece


Technical data sheet

Reduction, metric thread

Item number: 2030664

Dimensions

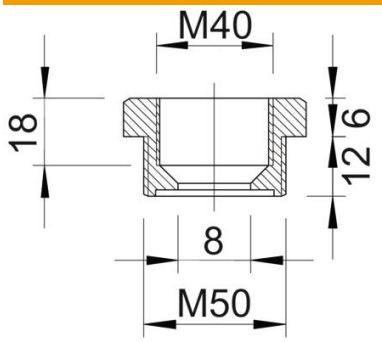



Dimension E	60 mm
Dimension L	18 mm
Dimension L1	12 mm
Dimension L2	6 mm
Dimension L3	18 mm

Technical data

explosion-proof	no
Thread type: External thread	Metric
Thread type: Internal thread	Metric
Thread length	12 mm
Thread dimension, metric, external	50
Thread dimension, metric, internal	40
Halogen-free	yes
ROHS-conformant	yes
WAF	55
Nickel-plated	no