
Technical data sheet

Reduction, PG thread

Item number: 2030780

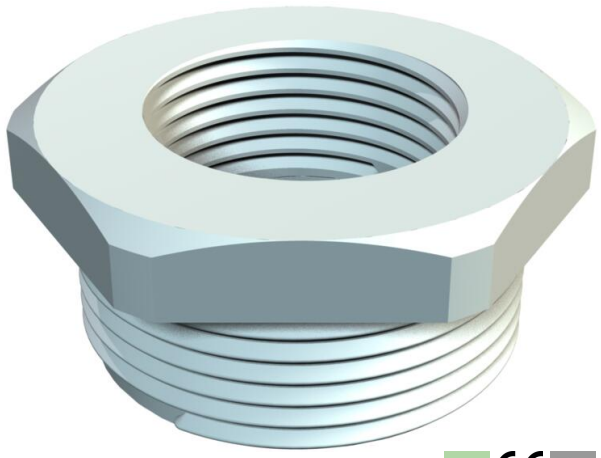

Reducer with PG inner and out thread to DIN 40430 for the mounting of plastic cable glands or
IP54 protection rating without additional connection sleeve. Protection rating of
up to IP68 possible with additional connection seal, such as an O-ring or flat
sealing ring.
To prevent damage caused by differences in material behaviour, avoid using a mix of materials
Use products made from polyamide (cable glands) exclusively with polyamide accessory parts
locknuts, reducers, expansions, etc.). Use products made from polystyrene exclusively with po

HALOGEN FREE

PA Polyamide

Master data


Item number	2030780
Type	107 R PG21-16 PA
Description 1	Reduction
Manufacturer	OBO
Dimension	PG21-PG16
Colour	Light grey; RAL 7035
Material	Polyamide
Smallest sales unit	50
Unit of quantity	Piece
Weight	0.65 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,0288 kg CO2e / 1 Piece


Technical data sheet

Reduction, PG thread

Item number: 2030780

Dimensions

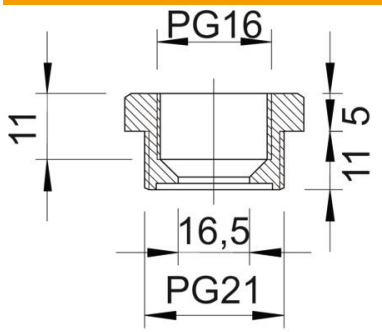



Dimension D	16.5 mm
Dimension E	35.5 mm
Dimension L1	11 mm
Dimension L2	5 mm
Dimension L3	11.5 mm

Technical data

explosion-proof	no
Thread type: External thread	PG
Thread type: Internal thread	PG
Thread length	11 mm
Thread dimension, PG, external	21
Thread dimension, PG, internal	16
Halogen-free	yes
ROHS-conformant	yes
WAF	32
Nickel-plated	no