


Technical data sheet

Wall and support bracket AW 30

Item no. 6419828

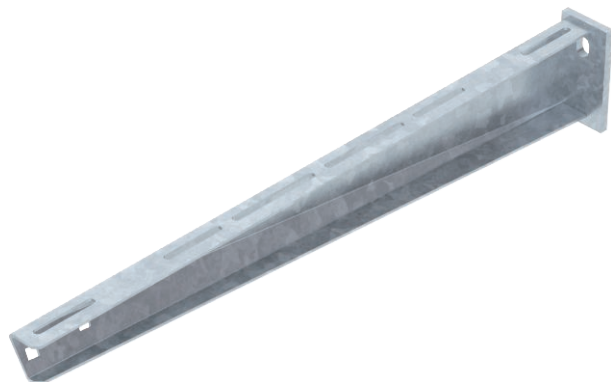

Medium-duty wall and support bracket with welded head plate.

Fastening of the bracket to the U support of width 400 mm or greater using a hexagonal bolt through both sides of the support. Please insert suitable spacers.



St

Steel


FT

Hot-dip galvanised

Master data

Item no.	6419828
Type	AW 30 61 FT
Description 1	Wall and Support bracket
Description 2	with welded head plate
Dimension	B610mm
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	1 Piece
Weight	157,00 kg/100 pc.

Technical data

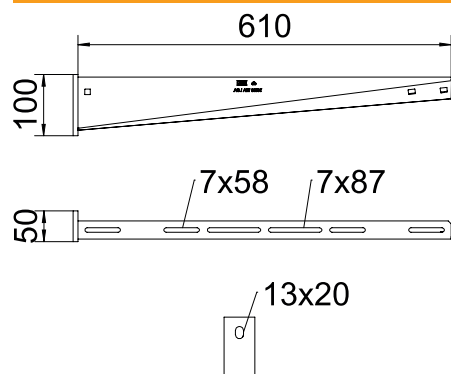

Width	610,00 mm
Side height	100,00 mm
Dimension A	50,00 mm
Dimension B	610,00 mm
Dimension H	100,00 mm
Dimension L	610,00 mm
Hole diameter	13,00 mm
Dimension value	610 x 100
Version	Wall and support brackets
Version	Wall and support bracket
EPD article	☒
F in kN	3,00 kN
Suitable for maintaining electrical function	☐
Rustproof steel, pickled	☐
Angle range	90,00 - 90,00 °


Technical data sheet

Wall and support bracket AW 30

Item no. 6419828



Load charts

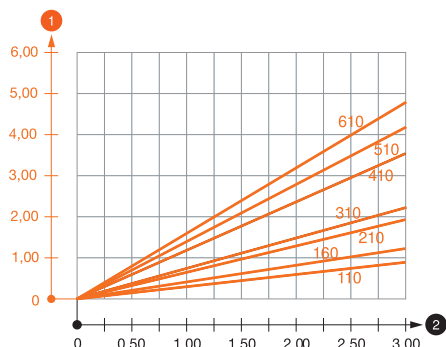

Load diagram, bracket, type AW 30


- 1 Bending of the bracket tip at permitted bracket load
- 2 Permitted bracket load in kN without man load
- Load curve with bracket lengths in mm

Characteristic anchor load values for wall and support bracket AW 30

Wall fastening								
		Max. load [kN]						
		Bracket width [mm]						
	Anchor type	110%	160	210	310	410	510	560
	BZ-U 10-10-30/90	1,50	2,10	1,65	1,40	1,50	1,00	1,00
	BZ 12-15-35/110	3,00	2,65	2,90	1,50	1,90	1,80	1,75
* Values with tray width 600								

Max. total load F = cable weight + cable tray + bracket. The load capacity values increase considerably when used in uncracked concrete. The values given are based on concrete of strength class C20/25. Observe the installation conditions of the DIBt approval (anchors).

Load values for AW 30 on suspended support



Load values for AW 30 on suspended support

Characteristic anchor load values for wall and support bracket AW 30

T1	Wall fastening							
T2		Max. load [kN]						
T3		Bracket width [mm]						
T4	Anchor type	110%	160	210	310	410	510	560
	BZ-U 10-10-30/90	1,5	2,1	1,65	1,4	1,5	1	1
	BZ 12-15-35/110	3,00	2,65	2,9	1,5	1,9	1,8	1,75
Tsub		* Values with tray width 600						