
# Technical data sheet

## Add-on tee 60 A2

## Item number: 6042321

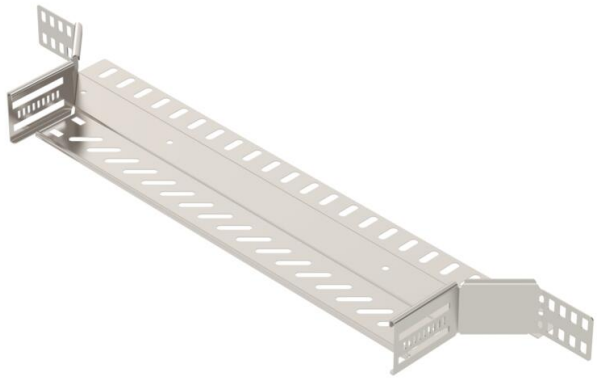

Add-on tee for the creation of a horizontal branch or cross-over, fitting for lock and screw-on cable trays of side height 60 mm. Screwless mounting with double clamps or screw connection with FRS truss-head screws and M6 combination nuts. Can be used indoors and outdoors. Fastening material must be ordered separately.

CE UK CA NEW

| | |
|---|---|
| A2 | Stainless steel |
| 2B | Bright, treated |

### Master data


| | |
|---|---|
| Item number | 6042321 |
| Type | RAA 650 A2 |
| Description 1 | Add-on tee |
| Description 2 | for cable tray |
| Manufacturer | OBO |
| Dimension | 60x500 |
| Colour | stainless steel |
| Material | Stainless steel 1.4301 |
| Surface<br>Surface standard | Bright, treated |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 77.5 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 7,0508 kg CO2e / 1 Piece |

# Technical data sheet

## Add-on tee 60 A2

## Item number: 6042321

### Dimensions

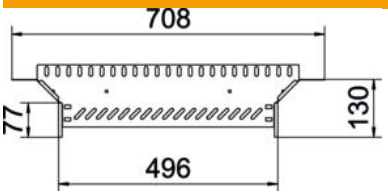


| | |
|---|---|
| Width | 500 mm |
| Height | 60 mm |
| Plate thickness | 1 mm |
| Dimension B | 500 mm |

### Technical data

| | |
|---|---|
| Departing width | 500 mm |
| Connector version | Integrated connector |
| Maintain electrical functions | no |
| Material thickness, floor plate | 1 mm |
| NATO hole pattern | no |
| ROHS-conformant | yes |
| Rustproof steel, pickled | no |
| Permitted temperature range, max. | 120 °C |
| Permitted temperature range, min. | -20 °C |
| Wide-span version | no |
| Type of connector, cable support system | screwed/clamped |
| Recommended quantity of bolts | 24 St. |
| Rail thickness | 1.25 mm |