

Technical data sheet

MS4121 mounting rail, slot 22 mm, double, perforated

Item no. 1122945



Heavy-duty profile/mounting rail with continuous perforation in base, slot width 22 mm. Double version, i.e. two profile rails are interconnected on the base (clinched).




St	Steel
FT	Hot-dip galvanised

Master data

Item no.	1122945
Type	MS4142P6000FT
Description 1	Profile rail
Description 2	perforated, slot 22mm
Dimension	6000x41x42
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	6 m
Weight	303,00 kg/100 m

Technical data

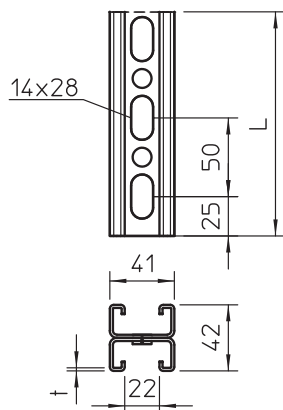

Length	6.000,00 mm
Width	41,00 mm
Height	42,00 mm
Dimension L	6.000,00 mm
Dimension WxH	41x42 mm
Version	Double profile
Type of perforation	Perforated bar
Suitable for maintaining electrical function	☐
Hole size	14x28 mm
Material thickness	2,00 mm
With tothing	☒
Profile shape	C profile
Slot width	22,00 mm
Static value A	
Static value Iy	
Static value Iz	
Static value Wy	
Static value Wz	