

Technical data sheet

MS4141 mounting rail, slot 22 mm, perforated

Item no. 1122978



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.




A2 Stainless steel, rustproof 1.4301
2B Bright, reworked

Master data

Item no.	1122978
Type	MSL4141P1000A2
Description 1	Profile rail
Description 2	perforated, slot 22mm
Dimension	1000x41x41
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Surface	Bright, reworked
Surface symbol	2B
Smallest sales unit (VG)	1 m
Weight	201,10 kg/100 m

Technical data

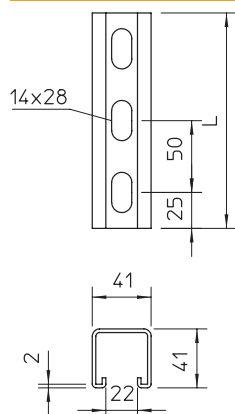

Length	1.000,00 mm
Width	41,00 mm
Height	41,00 mm
Dimension L	1.000,00 mm
Breakable	<input type="checkbox"/>
Dimension WxH	41x41 mm
Version	Single profile
Type of perforation	Perforated back
Drill hole spacing, centre	50,00 mm
Suitable for maintaining electrical function	<input type="checkbox"/>
Hole size	14x28 mm
Material thickness	2,00 mm
With perforation	<input checked="" type="checkbox"/>
With toothing	<input checked="" type="checkbox"/>
Profile shape	C profile
Slot width	22,00 mm
Static value A	
Static value Iy	
Static value Iz	
Static value Wy	
Static value Wz	