


Technical data sheet

MSL4141 mounting rail, slot 22 mm, perforated

Item no. 1122964

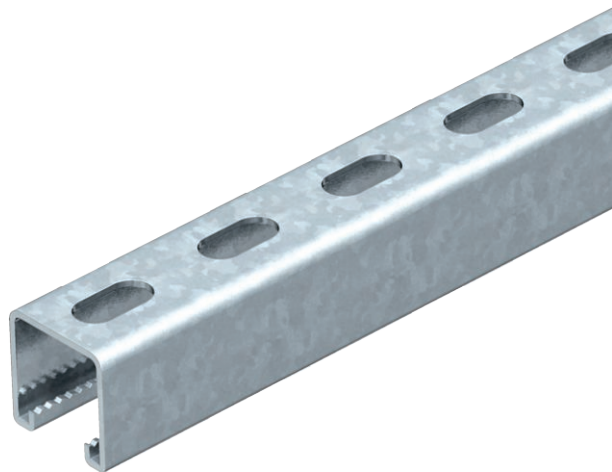

Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.




St	Steel
FT	Hot-dip galvanised

Master data

Item no.	1122964
Type	MSL4141P3000FT
Description 1	Profile rail
Description 2	perforated, slot 22mm
Dimension	3000x41x41
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	3 m
Weight	214,70 kg/100 m

Technical data

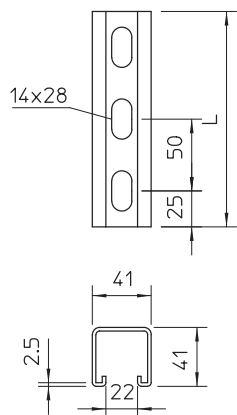

Length	3.000,00 mm
Width	41,00 mm
Height	41,00 mm
Dimension L	3.000,00 mm
Breakable	☐
Dimension WxH	41x41 mm
Version	Single profile
Type of perforation	Perforated back
Drill hole spacing, centre	50,00 mm
Suitable for maintaining electrical function	☐
Hole size	14x28 mm
Material thickness	2,00 mm
With perforation	☒
With tothing	☒
Profile shape	C profile
Slot width	22,00 mm
Static value A	
Static value Iy	
Static value Iz	
Static value Wy	
Static value Wz	