Technical data sheet

Clamp clip, single, A2 plastic pressure trough

Item number: 1178628



Suitable for all C profile rails with slot width 18 mm and 22 mm.

Polypropylene pressure trough, halogen-free, colour light grey RAL 7035.

HALOGEN FREE

U

18

22

A2	Stainless steel
2B	Bright, treated

Master data


Item number	1178628
Type	2056U 70 A2
Description 1	Clamp clip
Manufacturer	OBO
Dimension	64-70mm
Material	Stainless steel 1.4301
Surface Surface standard	Bright, treated
Smallest sales unit	15
Unit of quantity	Piece
Weight	20.5 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,6465 kg COe / 1 Piece

Technical data sheet

Clamp clip, single, A2 plastic pressure trough

Item number: 1178628

Dimensions

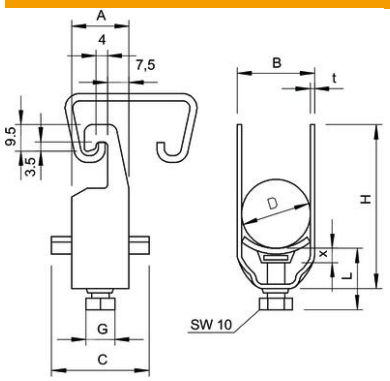

Dimension A	23 mm
Dimension B	76 mm
Dimension C	40 mm
Dimension G (mm)	M8
Dimension H	103 mm
Dimension L	38.5 mm
Dimension t	2.5 mm
Dimension x	6.5 mm

Technical data

Number of cables/pipes	1
for 1 cable H	103 mm
for 1 cable L	38.5
for rail with slot width (with interval), max.	22 mm
for rail with slot width (with interval), min.	18 mm
Halogen-free	yes
Max. Tightening torque	5 Nm
With plastic trough	yes
With metal trough	no
Mounting type	Profile rail
ROHS-conformant	yes
Impact-resistant	no
Clamping range D, max.	70 mm
Clamping range D, min.	64 mm
Surface addition	Untreated
Material addition	Rustproof steel
With counter-trough	no
Material of trough	Plastic
Material quality of trough	Polypropylene