
Technical data sheet

Cone cable gland, PG thread, light grey

Item number: 2036134

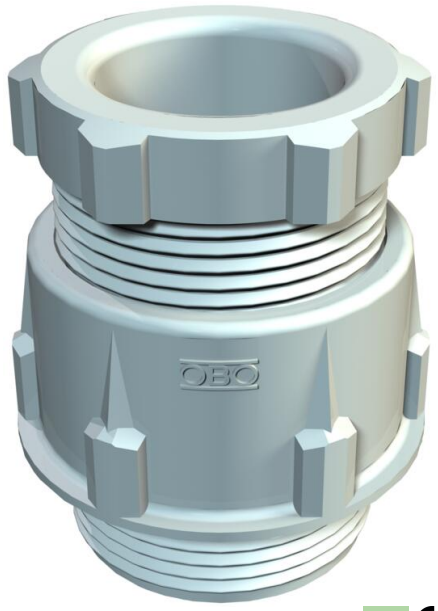

Standard cable gland, A form to DIN 46320 with single sealing ring made of NR/SBR.
PG connection thread to DIN 40430.
Protection rating: with connection thread sealing ring IP65, without connection thread sealing ring IP54.
Note: Only tighten polystyrene cable glands lightly due to the risk of stress crack formation.
To prevent damage caused by differences in material behaviour, avoid using a mix of materials
Use products made from polystyrene (cable glands) exclusively with polystyrene accessory pa
locknuts, reducers, expansions, etc.).
Use products made from polzamide exclusively with polyamide accessory parts.
Shock-resistant

HALOGEN FREE | CE | IP 54 | IP 65 | Pg

PS Polystyrene

Master data


Item number	2036134
Type	106 PG13.5
Description 1	Cable gland
Manufacturer	OBO
Dimension	PG13,5
Colour	Light grey; RAL 7035
Material	Polystyrene
Smallest sales unit	50
Unit of quantity	Piece
Weight	0.794 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,0348 kg CO2e / 1 Piece

Technical data sheet

Cone cable gland, PG thread, light grey

Item number: 2036134

Dimensions

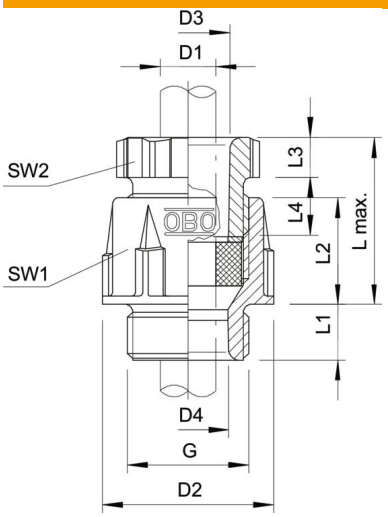

Length	27 mm
Width	27 mm
Height	37 mm
Dimension D1	13 mm
Dimension D2	27 mm
Dimension D3	13.4 mm
Dimension D4	13.5 mm
Dimension G	Pg13,5 mm
Dimension L max.	28 mm
Dimension L1	9 mm
Dimension L2	16 mm
Dimension L3	5 mm
Dimension L4	10.8 mm

Technical data

Type of seal	Sealing ring
Version for	Straight
Bend protection	no
Sealing area D, max.	13 mm
Sealing area D, min.	9 mm
explosion-proof	no
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Thread	Pg 13,5
Thread type	PG
Thread length	9 mm
Nominal thread size	13.5
Fibre-glass reinforced	no
Halogen-free	yes
Sealing insert, multiple	no
With locknut	no
ROHS-conformant	yes
Impact-resistant	no
WAF 1	24 mm
WAF 2	21 mm
Protection rating	IP65
Splittable gland	no
Strain relief option	no