

Technical data sheet

HW Cavity wall device box 61, CEE/PERILEX, with sealing ring
Item no. 2003819



CEE/PERILEX cavity wall device box with sealing ring, for use in cavity walls with an installation depth of at least 61 mm and a plate thickness of 5–40 mm.

- 2 screw domes
- Device screws, clamping straps
- 3 combination pipe entries of Ø 20 and 25 mm
- 3 entries for NYM cables 3 x 2.5 mm² or 5 x 1.5 mm²
- 2 entries for NYM cables 5 x 2.5 mm² or 7 x 1.5 mm²
- 1 entry for NYM cables 3 x 1.5 mm²

Tested according to DIN EN 60670-1, DIN EN 60670-22 and DIN 49073-1.




PP Polypropylene

Master data

Item no.	2003819
Type	HG 61-AD-IP
Description 1	HW Cavity wall device box
Description 2	for CEE/PERILEX with sealing
Available from	01.10.2021
Dimension	Ø74mm, H61mm
Colour	Orange
Material	Polypropylene
Material symbol	PP
Smallest sales unit (VG)	10 Piece
Weight	3,29 kg/100 pc.

Technical data

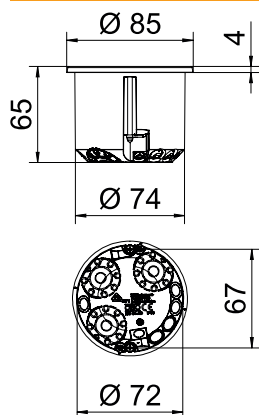

Height	61,00 mm
Diameter	74,00 mm
No. of entries	9
Entries	9
Number of switch boxes	1
Type of entry	NYM cables and pipes
Type of housing penetration	Break-out opening
Version for	Single
Shape	Device connection box
Fastening type	Fastening with bolt
Device fixing	Screws ,
Cover	Without
Cover fastening	Screws ,
Cover screw clearance	67,00 mm
Milling hole diameter	74,00 mm
Flame-resistant	acc. to VDE 0471/IEC 60695-2-11, test temperature 850°C
Shape	Round
For pipe diameter	20/25 mm
Combination entries Ø 20 / 25 mm	3
Cable entries 3 x 2.5 mm ² / 5 x 1.5 mm ²	3
Cable entries 5 x 2.5 mm ² / 7 x 1.5 mm ²	2
Cable entries 3 x 1.5 mm ²	1

Technical data sheet




HW Cavity wall device box 61, CEE/PERILEX, with sealing ring
Item no. 2003819



Technical data

Suitable for board thickness	5,00 - 40,00 mm
Halogen-free	<input checked="" type="checkbox"/>
With bolts	<input checked="" type="checkbox"/>
Nominal cross section	1,50 - 2,50 mm ²
Rated voltage	400,00 V
Impact-resistant	<input checked="" type="checkbox"/>
Protection rating	IP34
Support	Without
Airtight	<input type="checkbox"/>

Table 1

		
	1,5 mm ²	2,5 mm ²
	5	4
	15	12